# SUCTION PRESSURE REGULATING VALVE - XTF

Applicable to fluids and refrigerants of GROUP 1 & 2 according to Directive 2014/68/EU (15 May 2014)
(GROUP A1/A2L/A3 according to ANSI-ASHRAE 34-2016)

| Product Range | Temperature allowed range (TS): | Design Pressure (PS): |
|---|---|---|
| XTF | -40°C to +130°C (-40°F to +266°F) | 18 bar (261 psi) |

1

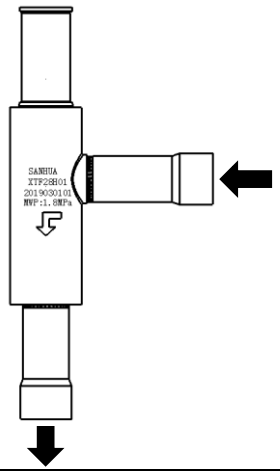

2

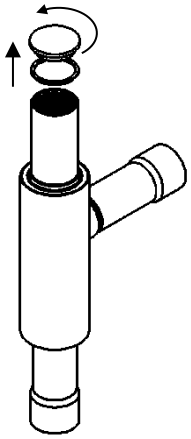

3

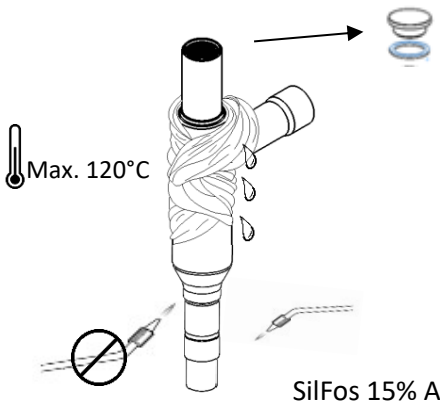


SilFos 15% Ag

4

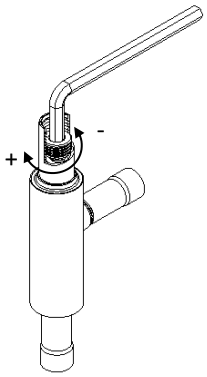


XTF15, XTF22
360 ° ~ 0,25 bar

5

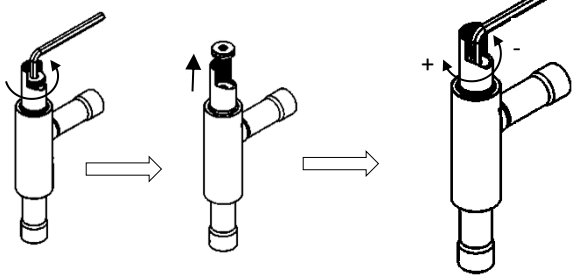


XTF15, XTF22
360 ° ~ 0,25 bar

6



| Product Series | Torque for cap N.m |
|---|---|
| XTF15 | 3~3.5 |
| XTF22 | 3~3.5 |
| XTF28 | 4~5 |
| XTF35 | 4~5 |