

SANHUA

Go green with SANHUA

A2L-ready refrigeration solutions

Sustainable installations with a low environmental impact.



Features

- Advanced PID algorithm to ensure accurate automatic adjustment of superheat
- Quick-Safe prevention of low and high superheat to ensure the system operating well at any conditions
- Small size, rail mounting design, easy to install
- Energy efficient, achieving the most efficient use of the evaporator

General Specification

- Applicable for various refrigerants
- Installation method: DIN railsnap-in or wall mounting with screws
- Compatible with Sanhua DPF and LPF valves
- Certification: UL, CE Declaration according to EMC



SEC 61X SERIES

Features

- Extremely high internal tightness, which is as good as with solenoid valves
- Precise proportional flow regulation
- Snap-on coil for easier installation
- Coil with IP67 works safely in extremely environment
- Applicable for oil-free system; built-in strainer at inlet
- Flow direction: Uniflow

General Specification

- Applicable for all common HCFC, HFC, HFO and HC
- Cooling capacity: from 0.5 to 17.3 kW (R290)
- Medium temperature TS min./max.: -40°C / +70°C (duty cycle rate below 40%)
- Design Pressure: 42 bar, MOPD: 35 bar
- Certifications: Compliance with the EN 60335-2-24 / 2-40 / 2-89 (VDE)



LPF SERIES

Features

- Applicable for reversible systems like heat pumps: bidirectional flow
- Optimized flow path design for noise reduction
- Wide range
- High MOP - 49 bar

General Specification

- Applicable for all common HCFC, HFC, HFO, HC
- Cooling capacity: from 0.5 to 110 kW (R290) 1 to 164 kW (for R32) - PS=49bar
- Medium temperature TS min./max.: -40°C / +85°C (duty cycle rate below 50%)
- Design Pressure: 49 bar, MOPD: 35 bar
- Certification: Compliance with the EN 60335-2-24 / 2-40 / 2-89 (VDE)



DPF SERIES

Features

- XHP Connector for SEC61x Controller
- Available with lead wire direct connector or with Packard and Molex socket connections
- Different pressure ranges and different level of accuracy

General Specification

- Applicable for HCFC, HFC, HC, HFO, R32 refrigerants
- YCQB Ratiometric models with output signal: 0.5V to 3.5V or 0.5V to 4.5V
- YCQC models with 4-20mA output signal
- Certification: Compliance with EN 60335-2-24/40/89 (VDE)



YCQ SERIES

Features

- Energy saving thanks to very precise capacity control: Up to 3800 steps
- Internal Tightness like a solenoid valve
- Optimized flow path design for noise reduction
- Applicable for reversible systems like heat pumps: bidirectional flow
- Corrosion resistant design, long lifetime, high reliability
- Models with integrated sight glass are available

General Specification

- Applicable for all common HCFC, HFC, HFO, HC
- Cooling capacity: from 20 to 500 kW
- Medium temperature TS min./max.: -40°C/+90°C
- Certifications: EAC, PED Declaration for fluids group 2 full range, and fluid group 1 for VPF12.5 to 100 (PS=50bar).

VPF SERIE



Features

- High MOP (45/49bar), high MOPD – 31 bar
- Wide range with Direct or Pilot operated models, different connections
- Coils are double sealed, watertight and safe, IP67
- High reliability, extensive factory tests

General Specification

- Applicable for all common HCFC, HFC, HFO, HC
- Capacity / Size: Kv = 0,16 ÷ 25 m³/h
- Medium temperature TS min./max.: -40°C/140°C
- Maximum Operating Pressure: 4,5/4,9 MPa (45/49 bar)
- Certification: PED cat.II (TUV Rheinland); Compliance with the EN 60335-2-24 / 2-40 / 2-89 (VDE)

MDF SERIES




Features

- Direct or Piston Type actuation
- Compact design, Angle or Straight shape
- Cost-efficient solution
- LDF soft sealing design / very low internal leakage

General Specification

- Applicable for all common HCFC, HFC, HFO, HC
- Capacity / Size: LDF: Kv = 0,12 to 1,1 m³/h
- Capacity / Size: FDF: Kv = 0,08 to 3,5 m³/h
- Medium temperature TS min./max.: -30°C/+120°C
- Max. operating pressure PS: 4.5MPa
- Certification: Compliance with the EN 60335-2-24 / 2-40 / 2-89 (VDE)

FDF SERIES LDF SERIES

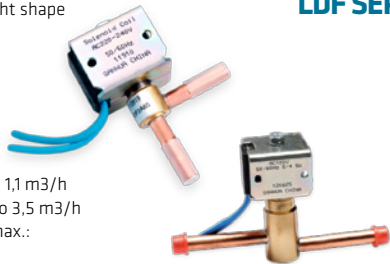

Features

- Straightway type, full port, low pressure drops, cost-effective
- Valve body and valve seat with welded structure, with high product reliability
- Bidirectional flow
- Special sealing materials to prevent internal leakage

General Specification

- Applicable for all common HCFC, HFC, HFO, HC
- Capacity size: SBV/SBV-R from 1/4" to 2" 5/8 (6mm to 67mm)
- Capacity size: RBV-R from 1/4" to 2" 1/8 (6mm to 54mm)
- SBV / SBV-R Medium temperature TS min./max.: -40°C/+120°C
- RBV-R Medium temperature TS min./max.: -60°C/+160°C
- SBV-R / RBV-R max. operating pressure PS: 4,9 MPa (49 bar)
- SBV max. operating pressure PS: 4,5 MPa (45 bar)
- Certification: PED cat.II (TUV Rheinland)

SBV / SBV-R SERIES RBV-R SERIES



Features

- Stainless steel capillary, sensing bulb and valve head
- Precise and smooth flow regulation
- Patented diaphragm design for less hysteresis and better consistency
- Wide range: MBP/LBP models, w/wo MOP

General Specification

- Applicable for HCFC, HFC, HFO refrigerants
- Cooling capacity: from 1 to 21 kW (R448A/R449A @ +4.4/38°C)
- Medium temperature TS min./max.: -40°C / +70°C; extended to -60°C / +70°C for range B models
- Max. operating pressure PS: 4.6 MPa (46 bar)
- Certification: PED Art.4.3

RFKH SERIES




Features

- Compact design with build-in orifice
- All connections pipes are completely in copper
- Valves with MOP, Bleed function can be provided to assure reliable compressor operation
- Applicable in a wide evaporation temperature range
- Reliable and consistent performance of superheat control

General Specification

- Special series designed for application with R290
- Cooling capacity: from 0,6 to 7 kW (R290, +4,4°C/+38°C)
- Medium temperature TS min./max.: -40°C / +70°C
- Max. operating pressure PS: 3,5 MPa (35 bar)
- Certification: PED Art.4.3

RFGB SERIES



Features

- YCVS / YCVS-R series: Piston type check valves
- CCV series: Magnetic type check valves
- YCVSH & YCVSH-R models with reinforced spring, applicable to compressor discharge pipes in single or multi compressor systems
- Low pressure drops during operation

General Specification

- Applicable for all common HCFC, HFC, HFO, HC refrigerants
- Capacity / Size: YCVS / YCVS-R: Kv = 0,56 to 29,1 m³/h
- CCV: Kv = 0,6 to 5,5 m³/h
- YCVS / YCVS-R Medium temperature TS min./max.: -50°C / +150°C
- CCV Medium temperature TS min./max.: -40°C / +160°C
- YCVS Max. operating pressure PS: 4,6 (46bar)
- YCVS-R & CCV Max. operating pressure PS: 4,9 MPa (49 bar)
- Certification: PED cat.II (TUV Rheinland)

YCVS / YCVS-R SERIES CCV SERIES




Features

- High precision color indicator
- Indicator pasted closely to the glass to prevent surface contamination
- Solid and corrosion resistant brass material
- New Annular humidity color indicator. Full port passage with low pressure drop

General Specification

- Applicable for HCFC, HFC, HFO, HC
- Capacity / Size: from 6 mm to 22 mm
- Medium temperature TS min./max.: -50°C / +80°C
- Max. operating pressure PS: 46/49 bar
- Certification: PED Art.4.3

SYJ / SYJ-R SERIES



Features

- DTG series: Uni Directional
- STG series: Bi-Directional
- Filtering fineness: 20µm
- High moisture absorption
- High corrosion resistance 500h SST

General Specification

- Applicable for all common HCFC, HFC, HFO, HC
- DTG: Capacity/Size: 1,5 inch³ ÷ 75 inch³
- STG: Capacity/Size: 5 inch³ ÷ 30 inch³
- Medium temperature TS min./max.: -30°C / +120°C
- Max. operating pressure PS max.: 48,3/49 bar
- Certification: Certification: PED Art.4.3



DTG SERIES STG SERIES




Features

- Suitable for cooling capacities from 3.5 to 409kW (R290, Condition 2, ΔP=0.1bar)
- Certified according PED cat.II by TUV Rheinland

General Specification

- Applicable for all common HCFC, HFC, HFO, HC
- Medium temperature TS min./max.: -30°C / +135°C
- Ambient temperature min./max.: -30°C / +50°C
- Relative humidity: 0 to 95% RH
- Max. operating pressure PS ≥ 4.5 MPa (45 bar)
- Certifications: UL/CSA3 and declaration according to LVD and PED



SHF/SHF-R SERIE

1. TABLE FOR R290 - HC & A2L

Product	Description	Remarks
SEC61x	Driver For Electronic Expansion Valve	
DPF(TS1)/(S03)	Electronic Expansion Valve - Uni polar	
LPF	Electronic Expansion Valve - Uni polar	
VPF	Electronic Expansion Valve - Bi polar	Limited to VPF 100
YCQB/C	Pressure Transmitter	Present in the common YCQ datasheet
SHF	4 Way Reversing Valve	
MDF	Solenoid Valve	Limited to MDF-A03-22H
LDF	Solenoid Valve	
FDF	Solenoid Valve	
RFKH20	Thermostatic Expansion Valve	Models suitable for R455A & R454C only
RFGB06	Thermostatic Expansion Valve	Models suitable for R290 only
SBV	Ball Valve	For models with DN≤25mm
SBV-R	Ball Valve	
YCVS	Check Valve	For models with DN≤25mm
YCVS-R	Check Valve	
SYJ	Sight Glass	
DTG	Uni-Flow Filter Drier	
STG	Bi-Flow Filter Drier	

Note: Main HC refrigerants (A3 classification): R290; R1270, R170, R600, R600a ...

Main Slightly Flammable refrigerants (A2L classification): R32; R1234yf; R1234ze; R454A/B/C; R455A; R452A/B ...

2. TABLE FOR R32

Product	Description	Remarks
SEC61x	Driver For Electronic Expansion Valve	
DPF(TS1)/(S03)	Electronic Expansion Valve - Uni polar	
VPF	Electronic Expansion Valve - Bi polar	Limited to VPF 100
YCQ	Pressure Transmitter	Special models for R32 present in the common YCQ datasheet
SHF-R	4 Way Reversing Valve	
MDF-RH	Solenoid Valve	Limited to MDF-A03RH-22H
YCQB/C-R32	Pressure Transmitter	On request
SBV-R	Ball Valve	
RBV-R	Ball Valve	
CCV	Check Valve - Magnetic Type	
YCVS-R	Check Valve - Piston Type	
SYJ-RH	Sight Glass	
DTG-932	Uni-Flow Filter Drier	
STG-932	Bi-Flow Filter Drier	
SSV	Brass Service Valve	

Note: all the product families suggested for R32 systems can also be selected and installed in systems operating with A2L and A3 refrigerants

SANHUA

Go green with SANHUA A2L

SELECT HIGH RELIABILITY - SELECT RFKH FOR A2L

SANHUA RFKH thermostatic expansion valves
with 8 sizes of interchangeable orifices

Stainless steel capillary, sensing
bulb and valve head for **precise and
smooth flow regulation**

Diaphragm with a **high tensile strength**

Settable Consistent Superheat

Excellent performance
at low temperatures

**Robustness & High
resistance to corrosion**



Wide range of models as flare or solder for MBP/LBP applications,
- with or without external pressure equalization - also with MOP

Designed for R407C, R404A, R507A, R134a, R404A, R410A, R407A,
R407F, R448A, R449A, R452A, R450A, R513A, R455A, R454C

www.sanhuaeurope.com